



Cost-optimized, Configure-free Gigabit Uplink PoE+ Switch for System Integrators.

Benchu group SP5200-8PFE2GE1GF, an ideal Gigabit Uplink PoE Switch, provides a cost-effective advantage to local area networks of SMBs. Offering Layer 2 data packet switching and stable operation, this model also complies with IEEE 802.3at Power over Ethernet Plus (PoE+) at an affordable price.

By offering reliable switching technology and advanced networking features, the SP5200-8PFE2GE1GF optimizes the installation and power management of network devices such as wireless access

The SP5200-8PFE2GE1GF is equipped with 8-10/100BASE-T Fast Ethernet ports and 2-10/100/1000BASE-T RJ45 and 1- 1000BASE-X SFP interfaces with inner power system. Its 8 Fast Ethernet ports are integrated with an 802.3at PoE+ injector function. It offers a rack-mountable, safe and reliable power solution for SMBs deploying Power over Ethernet networks.

The PoE in-line power following the IEEE 802.3at/af standard makes the SP5200-8PFE2GE1GF able to deliver 10/100M speed data and up to 30 watts of power per port to 8 PoE compliant powered devices (PDs) with a combined power output budget of up to 120 watts. Two 1Gb RJ45 and one 1Gb SFP+ ports for aggregation to the network core. The SP5200-8PFE2GE1GF provides more flexibility in power requirement for all kinds of PDs with affordable installation costs.

Highlights

The Benchu group Unmanaged PoE+ Switches provides a great value, By offering reliable switching technology and advanced networking features, the PoE+ switch optimizes the installation and power management of network devices such as wireless access points, VoIP phones, and security cameras. It also eliminates time and cost of deployment by integrating power and data switching into one unit and freeing network devices from restrictions of power outlet locations and the additional AC wiring.



Key features include:

- Complies with IEEE 802.3af/at Power over Ethernet end-span PSE
- Up to 8 ports of IEEE 802.3af/802.3at devices powered
- Supports PoE power up to 30 watts for each PoE port, all power up to 112W PoE budget.
- Each port supports 52V DC power to PoE powered device
- PD alive check function
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 250m
- Hardware-based 10/100Mbps and 10/100/1000Mbps auto-negotiation and auto MDI/MDI-X
- Flow control for full duplex operation and back pressure for half duplex operation
- Integrates address look-up engine, supporting 4K absolute MAC addresses
- Automatic address learning and address aging

Build a future-proof network with BENCHU:

- Solid performance with non-blocking architecture, 4K MAC addresses, 7.6Gbps Backplane bandwidth, 5.66Mpps Switch Throughput
- Up to 8 ports of IEEE 802.3af/802.3at devices powered
- Distance Extended for Transmission of Power and Data to 250m
- Features port-based VLAN function that helps to prevent the IP camera's multicast or broadcast storm from influencing each other.
- PoE+ support on all ports, PoE power up to 30 watts for each PoE port
- 1 Dedicated SFP fiber uplink, Extends network distance with highly Gigabit performance via fiber optic cable.

Fast Access

- The remote units provide the full line-speed forwarding capability. All ports support non-blocking data packet forwarding, providing users with high-speed access experience and meeting the requirements of high-bandwidth services such as HD video conferencing, online video, and large file download.

BENCHU Quality and Reliability

- Low power consumption, fanless, high-strength metal casing.
- high redundancy design, providing a long term and stable PoE power output.
- CE, FCC, RoHS.
- The user-friendly panel can show the device status through the LED indicator of PWR, Link.

Easy operation and maintenance

- Hardware-based 10/100Mbps and 10/100/1000Mbps auto-negotiation and auto MDI/MDI-X.
- Flow control for full duplex operation and back pressure for half duplex operation
- Supports Energy-Efficient Ethernet (EEE) function (IEEE 802.3az)
- Desktop installation, Silent Operation
- Plug and play, No configuration required



Hardware at a Glance

FRONT						REAR	SIDE
Model Name	10/100Base-T RJ45 ports	10/100/1000Base-T RJ45 ports	1GBASE-X Fiber SFP Ports	PoE+ 802.3at Ports	Power Budget	Power Supply	Fans
SP5200-8PFE2GE1GF	8	2	1	8 PoE+	120W	1 internal PSU, fixed	Fanless

Performance at a Glance


Model Name	Packet buffer	Chip	Fabric	Switch Throughput@64bytes	MAC Address Table	Latency (Max Connection Speed)
SP5200-8PFE2GE1GF	1.2MB	Realtek	7.6Gbps line-rate	5.66Mpps	4K	1G Copper: <3.35µs 1G Fiber: <2.5µs

Features and Benefits

Hardware Features	
100BASE-T Copper Ethernet PoE+ connections	Support VoIP, Surveillance and Wi-Fi AP deployments, scal-able for future growth. Never face the risk of running out of PoE ports.
1000BASE-T Copper Ethernet connections	Two 1G RJ45 and one 1G SFP+ ports for aggregation to the network core. Support for Fiber and Copper modules.
1GBASE-X Fiber SFP ports	
Great choice of PoE port counts and PoE power budgets that can adapt to the business’s needs	112W PoE budget available across 8 - 10/100M PoE+ ports (802.3at) – Connect multiple power demanding devices to your network with a single wire for power and connectivity.
Energy Efficient Ethernet (IEEE 802.3az)	Maximum power reduction for onging operational cost savings.

Target Application

Network Convergence

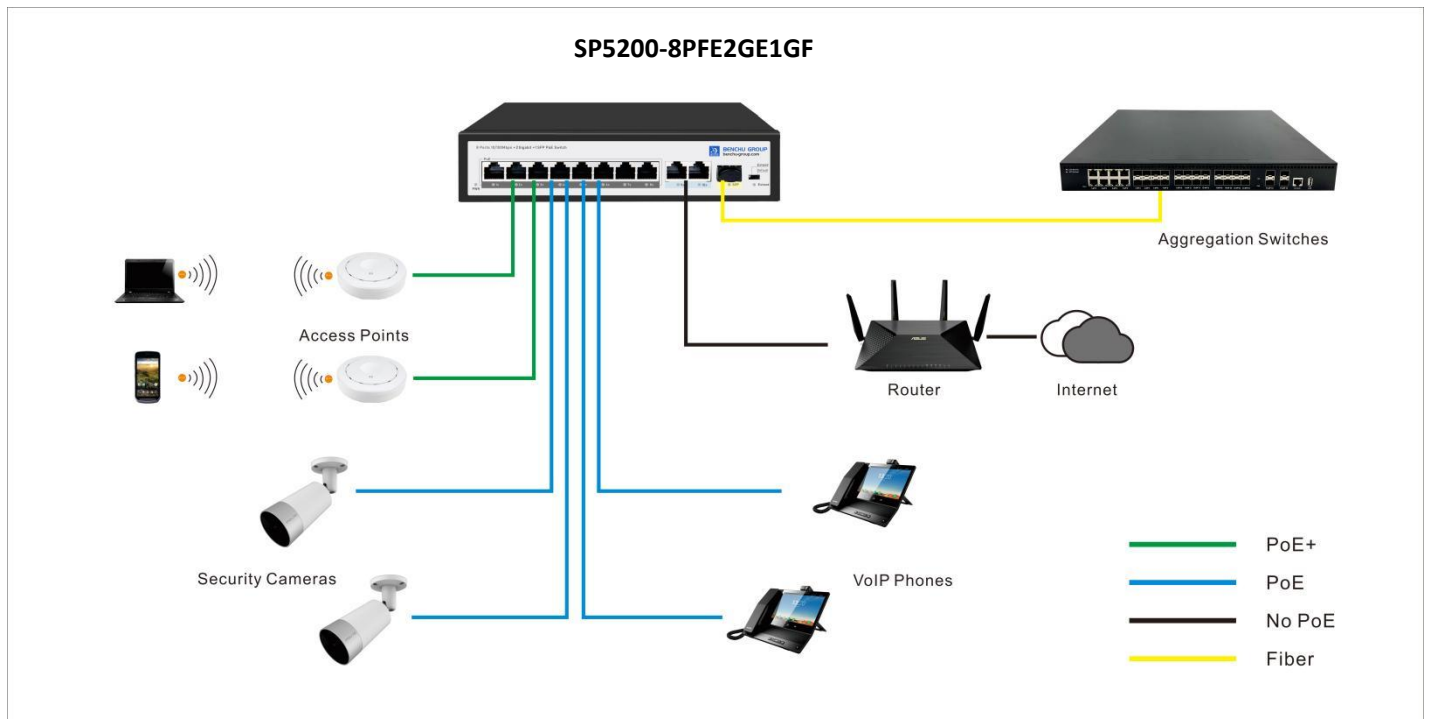


Within small and medium-sized organizations — especially in the hospitality, catering, education, and retail industries — there is growing deployment of VoIP phones, IP security cameras, video-over-IP endpoints, proximity sensors, LED lighting, secure access door locks, and other IoT devices. The dense proximity of these devices requires network switches capable of supporting PoE so a network manager can add power-hungry devices to the network with a single wire for power AND connectivity. Wave 2 802.11ac wireless access points and pan-tilt-zoom HD surveillance cameras with features such as night vision and built-in motion tracking also require PoE+ power (802.3at), increasing the power demands on PoE switches.

The new 8-port BENCHU GROUP PoE+ Switches support dense deployments of these modern high-power PoE+ devices. with enhanced performance and a focus on usability within commercial environments:

- 112W PoE budget across 8 x 100M PoE+ ports
- 2 x 1Gb RJ45 Ports and 1 x 1Gb SFP fiber ports for aggregation to the network core to facilitate users' flexible networking
- Comply with IEEE 802.3 af/at PoE power supply standard, automatically identify PoE equipment for power supply.
- PoE ports support priority mechanism. When the remaining power is insufficient, priority is given to ensuring the power supply of high-priority ports to avoid equipment overload.
- Support non-blocking wire-speed forwarding.
- Plug and play, no configuration, simple and convenient.
- Limited Lifetime* Warranty, Tech support

Structure Diagrams

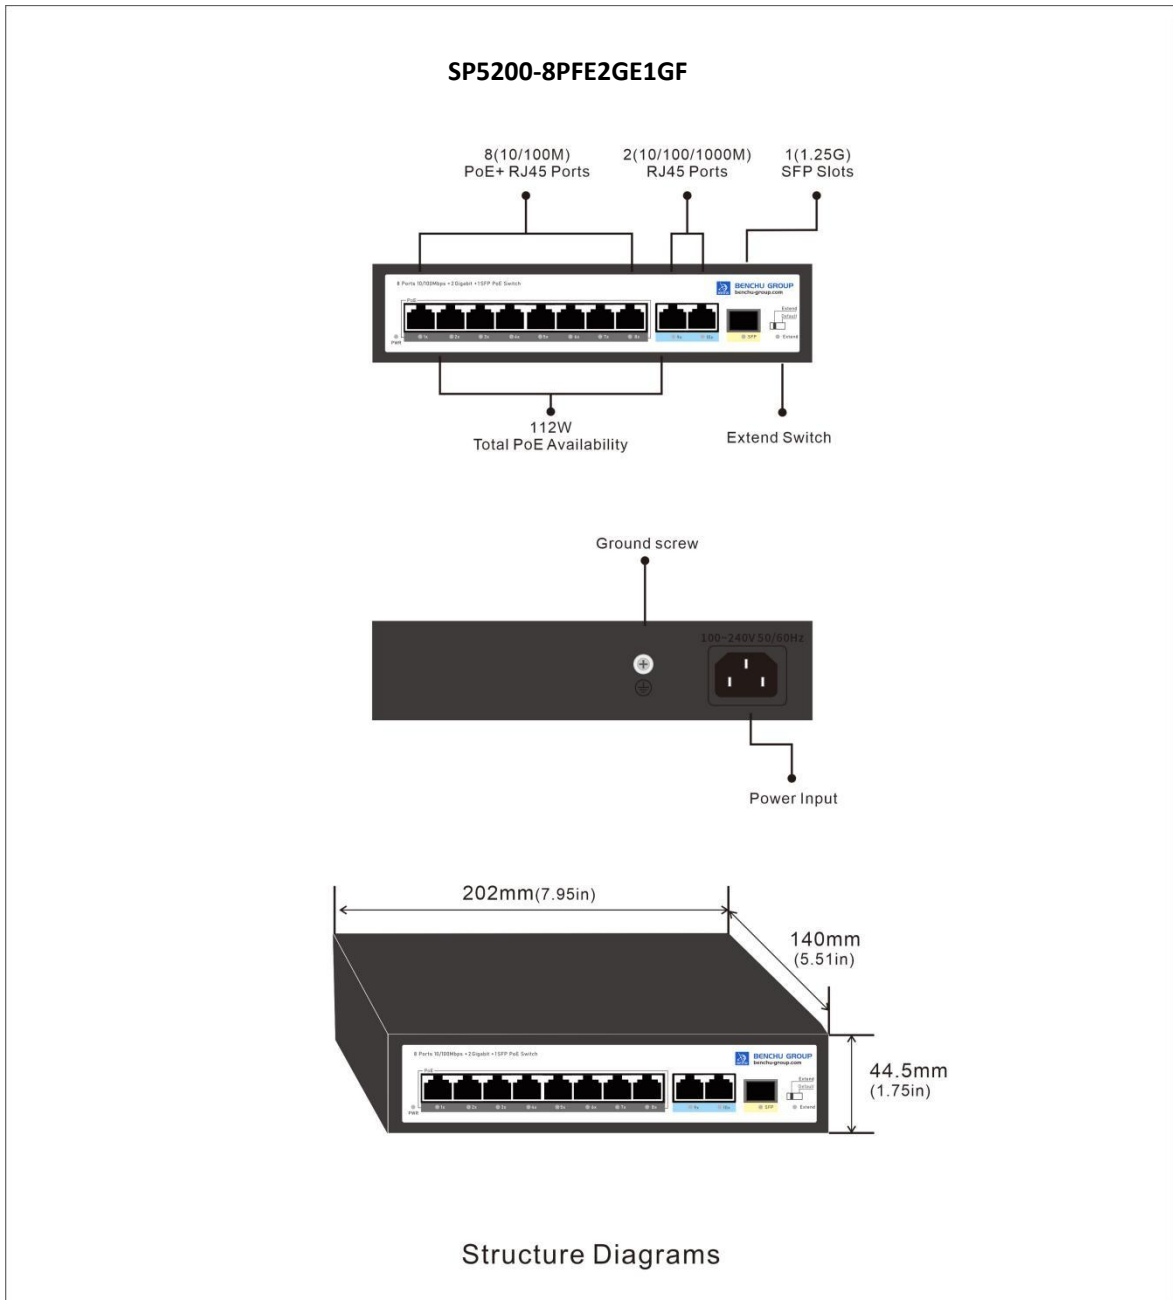



Technical Specifications	SP5200-8PFE2GE1GF
10M/100M RJ-45 copper ports	8
10M/100M/1G RJ-45 copper ports	2
PoE / PoE+ ports	8 PoE+
1G SFP (fiber) ports	1
Power over Ethernet	
PoE Standard	IEEE 802.3at Power over Ethernet Plus/PSE; Backward compatible with IEEE 802.3af Power over Ethernet
PoE Power Supply Type	End-span: 1/2 (+), 3/6 (-)
PoE Power Output	Per port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af); Per port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)
PoE Power Budget	112 Watts
Number of PDs, 7 watts	8
Number of PDs, 15 watts	7
Number of PDs, 30 watts	3
Performance Specification	
Chip	Realtek
Packet buffer memory (Dynamically shared across only used ports)	1.2 Mb
Forwarding modes	Store-and-forward
Bandwidth	7.6 Gbps
Packet forwarding rate (64 byte packet size) (Mpps)	5.66Mpps
MAC address database size (48-bit MAC addresses)	4K
Forwarding Mode	Store and Forward(Full Wire Speed)
Mean Time Between Failures (MTBF) @ 25°C	110,003 hours
100M Copper Latency (64-byte; 1518-byte; 9216-byte frames)	8.521µs; 8.622µs; 8.735µs
1G Copper Latency (64-byte; 1518-byte; 9216-byte frames)	3.443µs; 3.552µs; 3.633µs
1G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	2.995µs; 3.113µs; 3.181µs



IEEE Network Protocols	SP5200-8PFE2GE1GF
<ul style="list-style-type: none">• IEEE 802.3 Ethernet• IEEE 802.3u 100BASE-T• IEEE 802.3ab 1000BASE-T• IEEE 802.3z Gigabit Ethernet 1000BASE-SX/LX	<ul style="list-style-type: none">• IEEE 802.3af PoE• IEEE 802.3at PoE+• IEEE 802.3az Energy Efficient Ethernet (EEE)• IEEE 802.3x Full-Duplex Flow Control
Monitoring	
LEDs	Yes
Per port	Speed, Link, Activity; PoE in different mode
Per device	Power
Physical Specifications	
Dimensions	202 x 140 x 44.5mm (7.95 x 5.51 x 1.75 in)
Weight	1.1 kg (2.53 lb)
Power Consumption (when all ports used, line-rate traffic and max PoE)	120W
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)	8W
Idle power consumption (all ports link-down standby) (Watts)	5W
Energy Efficient Ethernet (EEE) IEEE 802.3az	Yes (deactivated by default)
Fan	Fanless
Environmental Specifications	
Operating	
Operating Temperature	-20° to 50°C (-4° to 122°F)
Humidity	90% maximum relative humidity (RH), non-condensing
Altitude	10,000 ft (3,000 m) maximum
Storage	
Storage Temperature	-20° to 70°C (-4° to 158°F)
Humidity (relative)	95% maximum relative humidity, non-condensing
Altitude	10,000 ft (3,000 m) maximum



Electromagnetic Emissions and Immunity

Certifications	CE mark, commercial FCC Part 15 Class A, VCCI Class A Class A EN 55022 (CISPR 22) Class A Class A C-Tick EN 55024 CCC 47 CFR FCC Part 15, SubpartB, Class A ICES-003: 2016 Issue 6, Class A ANSI C63.4:2014 IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013 AN/NZS CISPR 22:2009+A1:2010 CLASS A
----------------	--

Safety

Certifications	CB mark, commercial CSA certified (CSA 22.2 #950) UL listed (UL 1950)/cUL IEC 950/EN 60950 EN 60950-1: 2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013 AN/NZS 60950.1:2015 CCC (China Compulsory Certificate)
----------------	---

Warranty and Support

Hardware Limited Warranty	Limited Lifetime*
Technical Support via Phone and Email*	Limited Lifetime*
Limited Lifetime* 24x7 Online Chat Technical Support	Limited Lifetime*

Package Contents

All models	Smart Switch AC Power cord with C13 connector (localized to region of sale) Brackets and screws for rack mounting Rubber protection caps, which are already installed in the SFP sockets Installation guide
------------	---

